

# Under-Counter Pharmacy Refrigerator



**HYC-118** 

### Scope of Application:

Versatile, quiet, under-counter pharmacy refrigerator features safety lock, digital display with multiple alarms. Widely used for storage of biological products, vaccines, drugs and reagents in within pharmacy, pharma manufacture, clinical, public health and other life science laboratories.

## Innovative Design

LED Display
Ergonomic Design
Multiple Alarms
Lockable Design

#### Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone, Qingdao, 266109, P.R. China Tel: +86-0532-88935593 E-mail: inquiry@haierbiomedical.com Website: www.haiermedical.com











## Product Advantages (



# Superior Cabinet Temperature Uniformity, Auto Defrost

There are 9 test points within the interior which ensure superior temperature uniformity



#### Multiple Alarm

Capable of alerting failures due to high and low temperature, sensor error, power failure, low battery, door ajar and remote alarm



#### Energy Efficient Hydrocarbon (HC) Refrigeration System

Optimised refrigeration system, utilising high-efficiency HC compressor significantly reduces energy consumption



#### **LED Display**

Microprocessor control, digital display and temperature adjustment with an increment of  $0.1^{\circ}\text{C}$ 



#### Ergonomic Design

810mm cabinet height makes it easy to place under test bench, saving storage space



#### Greener by Design

HC refrigerants are natural non-toxic and more environmentally friendly



#### Lockable Design


Safety lock to prevent unauthorized access

## Product Introduction (



## **Under-Counter Pharmacy Refrigerator**

# Temperature Curve

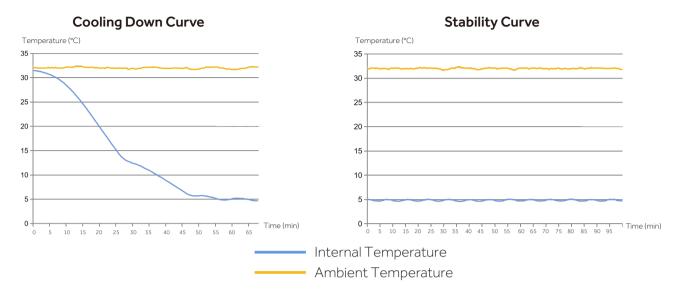

## Specifications ()

Model			HYC-118		
Technical Data	Cabinet Type		Upright, solid door		
	Climate Class		N		
	Cooling Type		Forced air cooling		
	Defrost Mode		Auto		
	Refrigerant		HC	HC HC	
	Sound Level (dB(A))		4	41	
Performance	Temperature Range (°C)		2~8		
Control	Controller		Microprocessor		
	Display		LED		
Electrical Data	Power Supply (V/Hz)		220~240/50/60	115/60	
	Power (W)		190	190	
	Electrical Current (A)		1.4	1.4	
Dimensions	Capacity (L/Cu.Ft)		118/	118/4.2	
	Net/Gross Weight (approx)	(kg)	41/	41/46	
		(lbs)	90.5/	90.5/101.5	
	Interior Dimensions (W*D*H)	(mm)	515*41	515*415*630	
		(in)	20.3*16	5*16.3*24.8	
	Exterior Dimensions (W*D*H)	(mm)	597*63	597*635*810	
		(in)	23.5*25	23.5*25.0*31.9	
	Packing Dimensions (W*D*H)	(mm)	680*69	680*690*910	
		(in)	26.8*27	26.8*27.2*35.8	
	Container load (20'/40'/40'H)		48/96/96		
Alarms	High/Low Temperature		Υ		
	Remote Alarm		Υ		
	Power Failure		Υ		
	Sensor Error		Y		
	Low Battery		Υ		
	Door Ajar		Υ		
Accessories	Caster		Y		
	Foot		Y		
	Porthole Shelves/Drawers		Y 7/1		
Certifications	CE Snelves/Drawers			3/1	
	UL			Y	
	UL		/	I	

\*Haier Biomedical reserves the right to change products and specifications without prior notice.