

Haier



Haier Laboratory Spark Free Refrigerator

Take protective measures to prevent flaming or fire.
Intelligently ensure safety.

All around explosion proof with **ATEX II C-T6** E.U. Certification.



* Provide ultimate protection for your laboratory materials.



HLR - 310FL/118FL



ATEX Explosion Proof Certification:

China's first ATEX II C-T6 Explosion Proof certified laboratory refrigerator. The verification acknowledged by authoritative organization makes Haier's product more reliable.

- **All Around Explosion Proof:**
The product equips with overcurrent and overvoltage protection system. It also equips with explosion proof fan for precise safety and protection.
- **Multiple Alarms:**
Include high and low temperature alarms, door open alarm, etc. The refrigerator can be remotely monitored and will alert users rapidly.
- **Precise Temperature Control:**
Internal temperature variation is within 3°C. The professional temperature control ensures stable refrigerator temperature at all time.



Haier Medical and Laboratory Products Co.,Ltd

Address: Brand Building, Haier Industrial Park, No.1
Haier Road, Qingdao, 266101, P.R.China
Tel: +86-0532-88936011 / 5955
Website: www.haiermedical.com

Haier Biomedical
Intelligent Protection of Life Science

Available in Aotearoa NZ from: CCAT Scientific 0800 222 812 | info@ccat.co.nz


Main Uses ➤ To store chemical or experiment reagents which are easily flammable, explosive, evaporative, corrosive, etc. It is suitable for institutional laboratories, research facilities, etc.

Product Advantages



All around explosion proof with ATEX II C-T6 E.U. Explosion Proof Certification.

Use antistatic liner, gasket and explosion proof fan motor. Equip with overcurrent and overvoltage protection system to provide explosion proof. China' s first ATEX II C-T6 Explosion Proof certified laboratory refrigerator ensures profession and acknowledgement.



3-16°C wide temperature range with precise control to prevent freezing.

3-16°C wide range temperature adjustment. Intelligent temperature control system keeps internal temperature variation within 3°C for great temperature uniformity.



One Key Search for Convenient Checking

Historical temperature data can be saved and checked by pressing only one key for convenient laboratory inspection.

Ergonomic Design



HC Cooling Saves Half Energy

The hydro carbon cooling system has twice the cooling efficiency and saves half the energy.



Glass Shelves

Tempered glass shelves can store over 40kg of various sized reagent bottle.



Low Noise

Ultra quiet fan motor with noise cancelling technology makes the entire refrigerator's noise lower than 40 decibels for a quiet and comfortable lab environment.



Dual Lock Design with Multiple Alarm System

The door comes with a mortise lock. A padlock can also be installed. The system has high and low temperature, open door, and sensor error alerting functions for better safety.



Cabinet Structure



Glass Shelf



ATEX Certification Label




Explosion Proof Cabinet/Fan




Application range

- Haier spark free refrigerators are ATEX certified in the application range II 3G Ex nA II T6, which means the appliances can be found in the whole II zone environment (including II A and II B, II C). Application can be found in almost all the biochemistry laboratory.

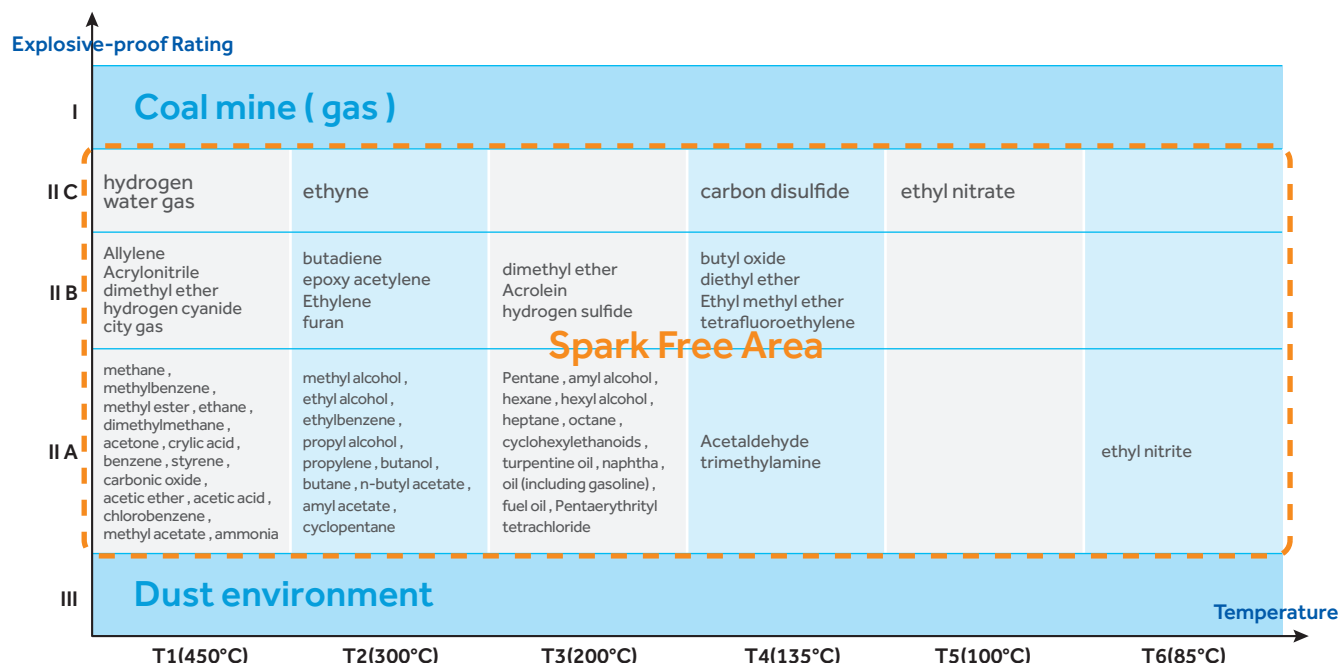

Product Dimension Drawings

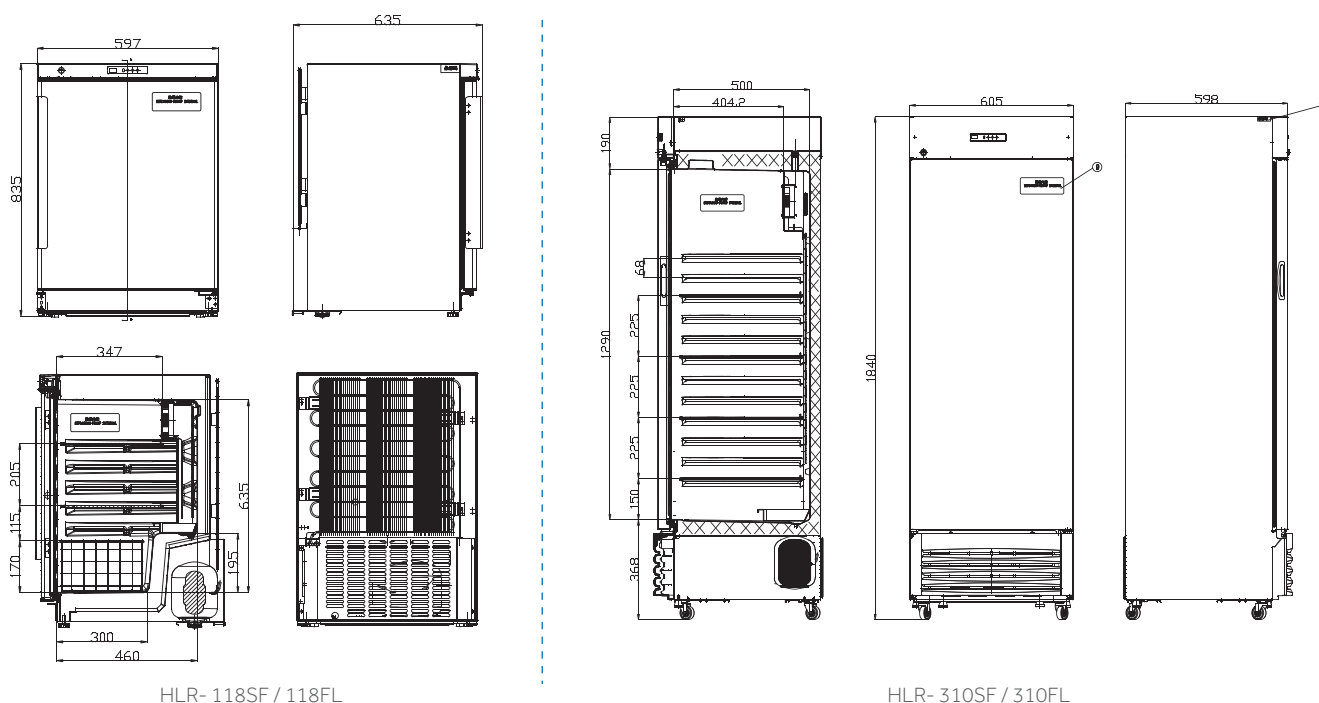

Warning: Do not store open containers of volatile substances in this refrigerator.

Available in Aotearoa NZ from: CCAT Scientific 0800 222 812 | info@ccat.co.nz

Product Specifications

Model			HLR-118SF	HLR-310SF	HLR-118FL	HLR-310FL
Parameters						
Technical Data	Type	Under-Counter		Upright	Under-Counter	Upright
	Climate Class	N, ST		N, ST	N, ST	N, ST
	Cooling Type	Forced Air Cooling		Forced Air Cooling	Forced Air Cooling	Forced Air Cooling
	Defrost Mode	Auto		Auto	Auto	Auto
	Refrigerant	R134a		R600a	R134a	R600a
	Noise((dB(A))	38		40	38	40
Performance	Temperature Range(°C)	3~16°C Adjustable		3~16°C Adjustable	3~16°C Adjustable	3~16°C Adjustable
	Ambient Temperature(°C)	16~38°C		16~38°C	16~38°C	16~38°C
Control	Controller	Microprocessor		Microprocessor	Microprocessor	Microprocessor
	Display	LED		LED	LED	LED
Electrical Data	Power Supply(V/HZ)	220		220	220	220
	Power(W)	150		210	150	210
	Electrical Current(A)	1.03		1.26	1.03	1.26
Dimension	Capacity(L/Cu.Ft)	118		310	118	310
	Net/Gross Weight(approx)	(kg)	44/49	72/83	44/49	72/83
		(lbs)	97/108	158.7/183	97/108	158.7/183
	Interior Dimension(W*D*H)	(mm)	515×415×630	560×500×1290	515×415×630	560×500×1290
		(in)	20.3×16.3×24.8	22.0×19.7×50.8	20.3×16.3×24.8	22.0×19.7×50.8
	Exterior Dimension(W*D*H)	(mm)	597×635×835	605×598×1840	597×635×835	605×598×1840
		(in)	23.5×25×32.9	23.8×23.6×73.6	23.5×25×32.9	23.8×23.6×73.6
	Packing Dimension(W*D*H)	(mm)	608×690×910	660×670×2020	608×690×910	660×670×2020
		(in)	26.8×27.2×35.8	26×26.4×79.5	26.8×27.2×35.8	26×26.4×79.5
Functions	Container Load(20'/40'/40'H)	48/102/102		27/57/57	48/102/102	27/57/57
	High/Low Temperature	Y		Y	Y	Y
	Power Failure	Optional		Optional	Optional	Optional
	Sensor Error	Y		Y	Y	Y
	Door Ajar	Y		Y	Y	Y
Accessories	Remote Alarm	Optional		Optional	Optional	Optional
	Caster	4		4	4	4
	Foot	2		2	2	2
	Shelves/Baskets	2/1		4/0	2/1	4/0
	Water tray	1		1	1	1
	Padlock Adapter Kit/Quantity	/		1	/	1
Others	Built-in Key Door Lock/Quantity	2		2	2	2
	Certificate	CE ATEX		CE ATEX	CE ATEX	CE ATEX
Temperature Setting Mode			Password Protection	Password Protection	Password Protection	Password Protection
Temperature Sensor			1 Resistance Thermometer	1 Resistance Thermometer	1 Resistance Thermometer	1 Resistance Thermometer
Power Consumption (kWh/24h)			0.8	1.4	0.8	1.4
Material						
Exterior Material			Sprayed Cold Plate	Sprayed Cold Plate	Sprayed Cold Plate	Sprayed Cold Plate
Interior Material/Colour			PS Plate/White	PS Plate/White	Antistatic PS Plate/Black	Antistatic PS Plate/Black
Insulation			Cyclopentane/Isopentane	Cyclopentane/Isopentane	Cyclopentane/Isopentane	Cyclopentane/Isopentane
Outside Door/Quantity			Foaming Door/1	Foaming Door/1	Foaming Door/1	Foaming Door/1
Outside Door Sealing Structure			Sealing Strip	Sealing Strip	Sealing Strip	Sealing Strip
Shelves Material/Quantity			Tempered Glass/2	Tempered Glass/4	Tempered Glass/2	Tempered Glass/4
Adjustable Shelves			Y	Y	Y	Y
Function Parameters						
Alarm System			Y	Y	Y	Y
Boot Delay Protection			Y	Y	Y	Y
Display Screen Password Protection			Y	Y	Y	Y
Compressor						
Compressor Type			Fully Closed	Fully Closed	Fully Closed	Fully Closed
Brand			Secop	Donper	Secop	Donper
Compressor Power(W)			172	138	172	138
Compressor Quantity			1	1	1	1
Condenser						
Type(Forced Cooling)			Back Condenser	Wire and Tube Forced Condenser	Back Condenser	Wire and Tube Forced Condenser
Material(Forced Cooling)			Steel Tube	Steel Tube	Steel Tube	Steel Tube
Outside Fan			No	EBM	No	EBM
Internal Temperature Uniformity			±3	±3	±3	±3
Internal Temperature Accuracy			1	1	1	1